Board of Directors
Ridge Park Luxury Condominiums Owners' Association Inc.
Los Alamos, New Mexico

Please find attached your reserve study report. This version was generated from association CSV source files using a Python-to-LaTeX workflow so that the report can be reproduced, updated, and audited from the underlying data package.

The report is intended to mirror the structure and feel of a conventional reserve study: a cover page, statement of position, component summaries, annual funding projections, expenditure schedules, and supporting disclosures. The purpose is not to imitate the original preparer's authorship, but to provide a transparent and reusable reporting format driven directly by the uploaded reserve data.

The reserve model remains a planning tool rather than a prediction of exact future outcomes. Actual repair timing, pricing, inflation, and investment returns will differ from the assumptions used here. The goal is to keep the association approximately funded at approximately the right time and to make long-range reserve decisions easier to review.

Sincerely,

Brendan J. Gifford
Ridge Park Treasurer

Ridge Park Luxury Condominiums Owners' Association Inc.

Reserve Management Plan

Type 1

Reserve Study with Data-Driven Analysis

For 30-Year Projection Period Beginning January 1, 2026

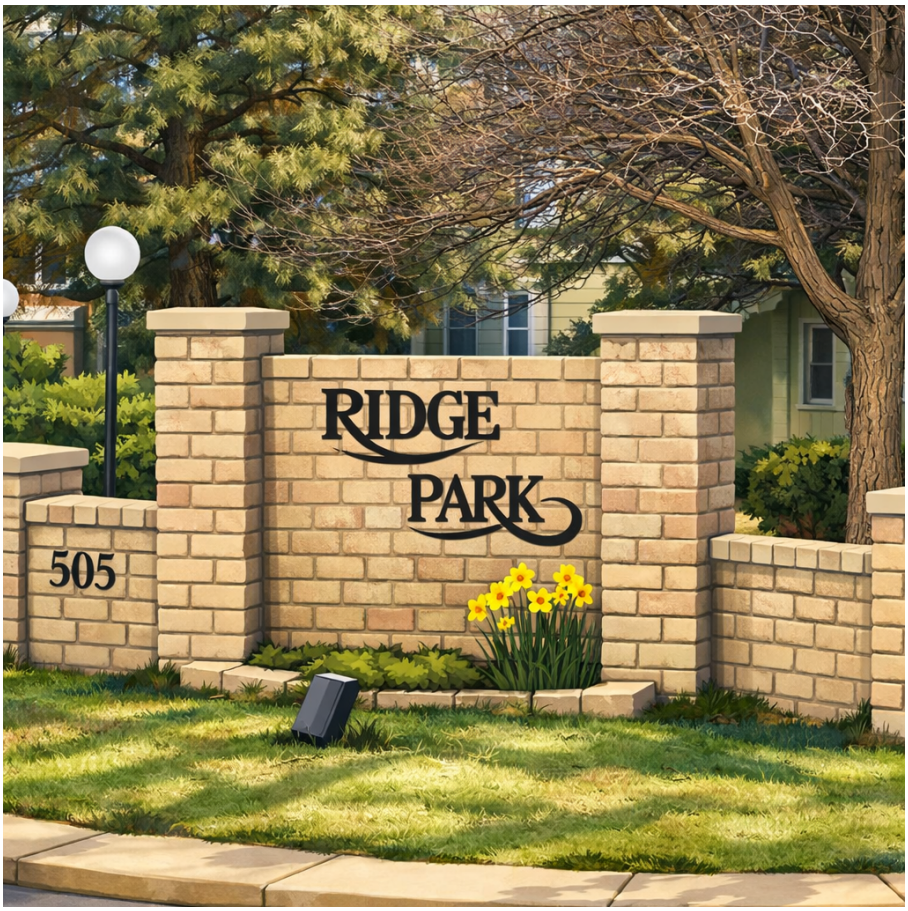

Contents

Preparer's Report on Reserve Study	**4**
Statement of Position	**5**
Summary of Major Components	**6**
Percent Funded - Annual - Ending Balance	**7**
Cash Flow - Annual	**8**
Disclosures	**9**
Expenditures Matrix: Years 1–10	**10**
Expenditures Matrix: Years 11–20	**11**
Expenditures Matrix: Years 21–30	**12**
Component List - Summary	**13**
Upcoming Major Components	**16**

Preparer's Report on Reserve Study

Description of Engagement and Report

This report was generated from the uploaded CSV data package for the association. The workflow reads the reserve assumptions, component inventory, replacement schedule, annual contribution plan, and reserve cash-flow projection, then renders a formatted LaTeX report designed to resemble a traditional reserve study binder. It is intended as a reproducible reporting layer over the association's source data.

Management's Responsibility

Management remains responsible for the assumptions underlying the reserve model, including inflation, investment return, beginning reserve balance, component scope, useful life estimates, replacement timing, and any planned contribution or special assessment strategy.

Generator Responsibility

The generator's responsibility is limited to organizing the supplied data into financial exhibits, narrative disclosures, and summary schedules. It does not perform a site inspection, engineering opinion, destructive testing, or warranty analysis.

Important Limitations

This report should be read together with the source CSV package. If the underlying source data changes, the PDF should be regenerated so that tables and summary metrics remain aligned with the current model.

This version is not prepared by a credentialed professional. It is best treated as a transparent analytical report, not as a substitute for engineering judgment or legal advice.

Statement of Position

Projection period:	2026 to 2055
Type of project:	Reserve Study
Number of units:	138
Location:	Los Alamos, New Mexico
Project construction date:	1984
Analysis date:	January 1, 2026
Report prepared by:	Brendan J. Gifford, Treasurer

Metric	Value
Current Replacement Cost	$6,283,484
Future Replacement Cost	$8,723,989
Current Reserve Fund Balance	$800,000
Fully Funded Reserve Balance	$3,426,289
Percent Funded	23.35 %
Reserve Deficit	$2,626,289
Reserve Deficit per Unit	$19,031
Projected Annual Reserve Contribution	$250,000
Average Annual Reserve Contribution per Unit	$1,812
Projected Monthly Reserve Contribution	$20,833
Average Monthly Reserve Contribution per Unit	$151

First-year reserve contribution: $250,000. First-year ending balance: $757,274. Ending balance in the final projection year (2055): $6,149,917.

Summary of Major Components

Analysis Date - January 1, 2026 Inflation: 3.00% Investment: 2.50% Contribution Factor: 0.00

Category	Useful Lives	Replacement Years	Remaining Years	Future Cost
Roofing	5-30	2030-2040	4:06-14:06	$2,582,679
Exterior Surfaces	7-30	2026-2040	0:06-14:06	$2,481,562
Asphalt	3-30	2026-2056	0:06-30:06	$2,071,456
Painting	3-12	2026-2036	0:06-10:06	$834,324
Balconies-Decks-Stairways	5-20	2026-2031	0:06-5:06	$431,381
Flooring	12-20	2034	8:06	$75,081
Renovation	10-20	2029-2039	3:06-13:06	$63,913
Concrete	3-25	2026-2044	0:06-18:06	$48,231
Fences-Walls-Gates	3-25	2026-2036	0:06-10:06	$35,466
Equipment	7-25	2028-2036	2:06-10:06	$29,002
Doors-Windows	10	2036	10:06	$24,551
Landscape	1-8	2026-2031	0:06-5:06	$14,613
Structural	5-10	2026-2028	0:06-2:06	$12,995
Plumbing	2-12	2026-2031	0:06-5:06	$7,898
Fire Safety	5	2029	3:06	$5,545
Signage	5-20	2026-2029	0:06-3:06	$5,292

Percent Funded - Annual - Ending Balance

Year	Ending Balance	Funded Balance	Percent Funded
2026	$757,274	$3,549,436	21.34%
2027	$844,970	$3,784,463	22.33%
2028	$747,438	$3,798,324	19.68%
2029	$835,619	$3,957,293	21.12%
2030	$678,650	$3,828,312	17.73%
2031	$737,429	$3,876,917	19.02%
2032	$928,373	$4,049,899	22.92%
2033	$1,384,622	$4,481,720	30.89%
2034	$1,628,862	$4,694,369	34.70%
2035	$1,623,250	$4,646,566	34.93%
2036	$1,014,610	$3,982,367	25.48%
2037	$876,625	$3,790,031	23.13%
2038	$671,180	$3,531,701	19.00%
2039	$449,872	$3,259,362	13.80%
2040	$232,207	$2,993,022	7.76%
2041	$623,742	$3,341,436	18.67%
2042	$1,069,081	$3,750,208	28.51%
2043	$1,673,222	$4,334,740	38.60%
2044	$2,230,160	$4,870,826	45.79%
2045	$2,875,251	$5,486,838	52.40%
2046	$2,575,348	$5,144,727	50.06%
2047	$2,865,826	$5,388,964	53.18%
2048	$3,132,583	$5,605,232	55.89%
2049	$3,497,932	$5,916,021	59.13%
2050	$3,729,968	$6,088,613	61.26%
2051	$3,886,291	$6,188,599	62.80%
2052	$4,330,671	$6,581,470	65.80%
2053	$4,861,321	$7,057,275	68.88%
2054	$5,426,704	$7,564,425	71.74%
2055	$6,149,917	$8,226,481	74.76%

Cash Flow - Annual

Year	Begin	Contribution	Special Assess.	Expenditures	Interest	Ending
2026	$800,000	$250,000	$0	$313,093	$20,367	$757,274
2027	$757,274	$300,000	$0	$233,110	$20,806	$844,970
2028	$844,970	$350,000	$0	$468,772	$21,241	$747,438
2029	$747,438	$400,000	$0	$332,699	$20,880	$835,619
2030	$835,619	$450,000	$0	$627,676	$20,706	$678,650
2031	$678,650	$500,000	$0	$460,390	$19,169	$737,429
2032	$737,429	$520,000	$0	$351,128	$22,071	$928,373
2033	$928,373	$540,000	$0	$113,410	$29,659	$1,384,622
2034	$1,384,622	$560,000	$0	$354,706	$38,946	$1,628,862
2035	$1,628,862	$580,000	$0	$628,148	$42,535	$1,623,250
2036	$1,623,250	$600,000	$0	$1,244,855	$36,216	$1,014,610
2037	$1,014,610	$610,000	$0	$773,872	$25,887	$876,625
2038	$876,625	$620,000	$0	$847,212	$21,767	$671,180
2039	$671,180	$630,000	$0	$867,800	$16,493	$449,872
2040	$449,872	$640,000	$0	$868,689	$11,023	$232,207
2041	$232,207	$650,000	$0	$270,379	$11,914	$623,742
2042	$623,742	$660,000	$0	$236,961	$22,301	$1,069,081
2043	$1,069,081	$661,139	$0	$92,092	$35,094	$1,673,222
2044	$1,673,222	$680,973	$0	$173,822	$49,787	$2,230,160
2045	$2,230,160	$701,402	$0	$121,014	$64,703	$2,875,251
2046	$2,875,251	$722,444	$0	$1,093,478	$71,131	$2,575,348
2047	$2,575,348	$744,118	$0	$523,446	$69,805	$2,865,826
2048	$2,865,826	$766,441	$0	$576,584	$76,900	$3,132,583
2049	$3,132,583	$789,435	$0	$508,755	$84,669	$3,497,932
2050	$3,497,932	$813,118	$0	$673,589	$92,507	$3,729,968
2051	$3,729,968	$837,511	$0	$778,795	$97,607	$3,886,291
2052	$3,886,291	$862,637	$0	$522,837	$104,581	$4,330,671
2053	$4,330,671	$888,516	$0	$474,543	$116,677	$4,861,321
2054	$4,861,321	$915,171	$0	$480,188	$130,401	$5,426,704
2055	$5,426,704	$942,626	$0	$365,684	$146,271	$6,149,917

Disclosures

- This report was generated from CSV source files supplied in the working directory, including assumptions, component inventory, projected expenditures, annual contribution schedules, and reserve cash-flow outputs.
- Analysis date: January 1, 2026. Projection horizon: 30 years.
- Inflation assumption used in the model: 3.00%.
- Investment return assumption used in the model: 2.50%.
- Beginning reserve balance used in the projection: $800,000.
- Component replacement timing and cost estimates come from the uploaded component list and replacement schedule. Actual field conditions may cause different timing or scope.
- This document is formatted to resemble a conventional reserve study, but it is produced from the association's current analytical dataset rather than from proprietary reserve-study software.
- Readers should review contribution levels, projected expenditures, and percent-funded results together. No single table should be interpreted in isolation.

Expenditures Matrix: Years 1–10

Category	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035
Asphalt	$25,372			$27,725						$397,260
Balconies-Decks-Stairways	$65,968	$60,107	$108,208	$63,767	$65,680	$67,651		$31,205	$9,642	$19,863
Concrete	$15,223			$16,635			$18,177			$19,863
Doors-Windows										
Equipment			$6,331		$1,713	$3,000	$909			
Exterior Surfaces	$68,505	$60,107	$223,414	$74,857	$408,360	$173,539	$181,775	$6,241	$205,701	
Fences-Walls-Gates	$5,074		$1,615	$11,090		$2,941	$3,030	$1,872	$6,428	$3,310
Fire Safety				$5,545					$6,428	
Flooring									$75,081	
Landscape	$11,671	$8,363	$8,614	$12,753	$9,138	$12,354	$13,936	$9,985	$10,285	$15,228
Painting	$106,563	$104,534	$107,670	$116,445	$114,227	$117,653	$127,242		$3,857	$6,621
Plumbing	$5,074		$5,383		$5,711	$2,824	$6,059		$6,428	
Renovation				$2,772		$8,824			$30,855	
Roofing					$22,845	$60,427		$64,107		$166,002
Signage	$2,030		$2,153	$1,109		$2,353				
Structural	$7,612		$5,383			$8,824				

Expenditures Matrix: Years 11–20

Category	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045
Asphalt			$36,175		$61,404	$39,529			$43,195	$71,185
Balconies-Decks-Stairways	$4,092		$36,175				$36,643	$41,936	$5,183	
Concrete			$21,705			$23,717			$58,924	
Doors-Windows	$24,551									
Equipment	$17,049	$2,107			$4,421			$5,032	$2,592	
Exterior Surfaces	$223,957	$210,727	$217,048	$223,560	$230,267		$16,286	$25,162		
Fences-Walls-Gates	$23,869		$5,788	$11,178		$7,906		$2,516	$12,958	
Fire Safety				$7,452					$8,639	
Flooring										
Landscape	$10,911	$11,239	$16,640	$15,649	$12,281	$18,183	$13,029	$13,420	$19,869	$14,237
Painting	$184,130	$140,484	$151,934	$149,040	$153,511	$166,022	$162,860		$13,822	
Plumbing	$6,820		$7,235		$7,676		$8,143	$4,026	$8,639	
Renovation				$25,188						
Roofing	$736,520	$409,315	$347,277	$434,243	$399,129					$35,592
Signage	$2,728			$1,490		$3,162				
Structural	$10,229		$7,235			$11,859				

Expenditures Matrix: Years 21–30

Category	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055
Asphalt		$47,200			$51,577	$254,994	$262,644	$326,883	$278,639	$286,998
Balconies-Decks-Stairways	$105,398	$108,560	$160,432	$145,215	$134,099	$122,185	$6,566	$56,359		
Concrete		$28,320			$30,946			$33,815		
Doors-Windows	$32,994									
Equipment	$4,674	$1,416				$8,500	$6,303			
Exterior Surfaces	$105,398	$108,560	$111,816	$115,171	$159,887	$122,185		$11,272		
Fences-Walls-Gates	$4,583	$4,720	$2,917	$15,022	$5,158	$5,312		$9,017	$11,610	
Fire Safety				$10,015					$11,610	
Flooring	$65,988								$52,013	
Landscape	$14,664	$26,432	$15,557	$16,024	$23,725	$17,000	$17,510	$25,925	$18,576	$25,112
Painting	$183,300	$198,239	$262,525	$200,297	$216,621	$212,495	$218,870	$11,272	$6,966	
Plumbing	$9,165		$9,723		$10,315		$10,944		$11,610	$5,740
Renovation				$5,007		$15,937			$89,165	
Roofing	$549,901				$41,261					$47,833
Signage	$3,666		$3,889	$2,003		$4,250				
Structural	$13,748		$9,723			$15,937				

Component List - Summary

Category Component	Replace Date	Basis Cost	Quantity	Current Cost	Est Life	Rem Life	Future Cost
Asphalt							
Asphalt Crack Seal	7/26 - 7/38	$25,000	3	$75,000	3	0:06-12:06	$89,272
Asphalt Mill and Overlay	7/35 - 7/35	$3	100,000	$300,000	15	9:06	$397,260
Asphalt Seal Coat	7/40 - 7/56	$0	300,000	$120,000	5	14:06-30:06	$231,125
Asphalt Remove and Replace	7/51 - 7/55	$6	100,000	$600,000	30	25:06-29:06	$1,353,799
				$1,095,000			**$2,071,456**
Balconies-Decks-Stairways							
Balconies-Decks-Posts/Structural Supports	7/26 - 7/31	$2,500	138	$345,000	20	0:06-5:06	$377,471
Stairway/Balcony Railing	7/26	$7,500	1	$7,500	8	0:06	$7,612
Metal Stairway Flashing/Stringers	7/28	$15,000	1	$15,000	7	2:06	$16,150
Walkway Railing	7/28	$3,000	1	$3,000	8	2:06	$3,230
Wood Balcony Walls	7/28	$25,000	1	$25,000	5	2:06	$26,917
				$395,500			**$431,381**
Concrete							
Concrete Sidewalks-Stairs-Patios/Grinding-Repairs	7/26	$10,000	1	$10,000	3	0:06	$10,149
Curbs-Gutters	7/26	$5,000	1	$5,000	3	0:06	$5,074
Pool Area Concrete Deck	7/44	$12	1,592	$19,104	25	18:06	$33,008
				$34,104			**$48,231**
Doors-Windows							
Clubhouse Bathroom/Interior Doors	7/36	$5,000	1	$5,000	10	10:06	$6,820
Clubhouse Blinds	7/36	$1,000	1	$1,000	10	10:06	$1,364
Clubhouse Glass Doors	7/36	$3,500	1	$3,500	10	10:06	$4,774
Clubhouse Sliding Glass Doors	7/36	$4,000	1	$4,000	10	10:06	$5,456
Clubhouse/Fitness Windows	7/36	$4,500	1	$4,500	10	10:06	$6,138
				$18,000			**$24,551**
Equipment							
Pool Cover	7/28	$4	720	$2,880	12	2:06	$3,101
Pool Heater Raypak	7/28	$3,000	1	$3,000	15	2:06	$3,230
Pool Misc Pipes Valves	7/30	$1,500	1	$1,500	7	4:06	$1,713
Pool Filter Hayward	7/31	$1,300	1	$1,300	15	5:06	$1,530
Pool Rails-Ladder	7/31	$250	3	$750	15	5:06	$882
Pool Room Compressor	7/31	$500	1	$500	15	5:06	$588
Pool Pump Hayward	7/32	$750	1	$750	15	6:06	$909
Mail Boxes	7/36	$10,000	1	$10,000	25	10:06	$13,639
Pool Chemical Controller-Rola Chem	7/36	$2,500	1	$2,500	15	10:06	$3,410
				$23,180			**$29,002**
Exterior Surfaces							
Chimney Chases Structural Renovations	7/26 - 7/31	$2,500	138	$345,000	20	0:06-5:06	$377,471
Fascia-Flashing-Soffits	7/26	$10,000	1	$10,000	8	0:06	$10,149
Wood Siding	7/28 - 7/40	$12	125,000	$1,500,000	30	2:06-14:06	$1,964,994
Stucco Siding Repair	7/29	$10,000	1	$10,000	7	3:06	$11,090
Clubhouse Siding	7/31	$12	7,500	$90,000	30	5:06	$105,888
Corrugated Balcony Walls	7/33	$5,000	1	$5,000	10	7:06	$6,241
Pool Coping	7/36	$35	120	$4,200	20	10:06	$5,728
				$1,964,200			**$2,481,562**
Fences-Walls-Gates							

Category Component	Replace Date	Basis Cost	Quantity	Current Cost	Est Life	Rem Life	Future Cost
Concrete Brick Grouted Wall	7/26	$2,500	1	$2,500	3	0:06	$2,537
Pool Area Wall Repair	7/26	$2,500	1	$2,500	5	0:06	$2,537
Stacked Concrete Block Wall	7/28	$1,500	1	$1,500	5	2:06	$1,615
Chain Link Fence	7/29	$2,500	1	$2,500	10	3:06	$2,772
Wooden Perimeter Fence	7/29	$5,000	1	$5,000	5	3:06	$5,545
Pool Area Metal Rail Fence-Gate	7/36	$75	200	$15,000	25	10:06	$20,459
				$29,000			**$35,466**
Fire Safety							
Chimney Flues-Caps-Spark Arrestors	7/29	$5,000	1	$5,000	5	3:06	$5,545
				$5,000			**$5,545**
Flooring							
Clubhouse Carpet	7/34	$9	4,000	$36,000	12	8:06	$46,283
Clubhouse Tile Floor	7/34	$16	1,000	$16,000	20	8:06	$20,570
Pool Area Tile Exterior	7/34	$16	400	$6,400	20	8:06	$8,228
				$58,400			**$75,081**
Landscape							
Landscape Border Blocks	7/26	$1,000	1	$1,000	3	0:06	$1,015
Landscape Replenishment	7/26	$2,500	1	$2,500	3	0:06	$2,537
Tree Removal-Major Trimming	7/26	$8,000	1	$8,000	1	0:06	$8,119
Landscape Rock	7/31	$2,500	1	$2,500	8	5:06	$2,941
				$14,000			**$14,613**
Painting							
Painting Unit Buildings-Clubhouse-Exterior	7/26 - 7/32	$4	175,000	$700,000	10	0:06-6:06	$777,655
Parking Striping-Curb Painting	7/26	$5,000	1	$5,000	3	0:06	$5,074
Pool Area Metal Rail Fence-Gate-Painting	7/34	$15	200	$3,000	10	8:06	$3,857
Clubhouse Interior Painting	7/36	$2	20,000	$35,000	12	10:06	$47,737
				$743,000			**$834,324**
Plumbing							
Sewer Lateral Lines-Cleanouts	7/26	$5,000	1	$5,000	2	0:06	$5,074
Clubhouse Hot Water Heaters-Expansion	7/31	$1,200	2	$2,400	12	5:06	$2,824
				$7,400			**$7,898**
Renovation							
Clubhouse Maintenance Shop Remodel	7/29	$2,500	1	$2,500	10	3:06	$2,772
Clubhouse Pool Room-Shower Remodel	7/31	$5,000	1	$5,000	20	5:06	$5,883
Sauna Remodel	7/31	$2,500	1	$2,500	20	5:06	$2,941
Clubhouse Bar Remodel	7/34	$5,000	1	$5,000	20	8:06	$6,428
Clubhouse Bathroom Remodel	7/34	$6,000	2	$12,000	20	8:06	$15,428
Fitness Room Kitchenette Remodel	7/34	$3,500	1	$3,500	20	8:06	$4,500
Laundry Room Remodel	7/34	$3,500	1	$3,500	20	8:06	$4,500
Pool Resurface	7/39	$12	1,200	$14,400	15	13:06	$21,462
				$48,400			**$63,913**
Roofing							
Gutters-Downspouts	7/30	$20,000	1	$20,000	5	4:06	$22,845
Carport Roofs	7/31 - 7/39	$12	21,400	$256,800	25	5:06-13:06	$341,244
Clubhouse Roof	7/35	$12	4,500	$54,000	25	9:06	$71,507
Garage Flat Roof	7/36	$300,000	1	$300,000	10	10:06	$409,178
Unit Building Shingle Roofs	7/36 - 7/40	$12	100,000	$1,200,000	30	10:06-14:06	$1,737,905
				$1,830,800			**$2,582,679**

Category Component	Replace Date	Basis Cost	Quantity	Current Cost	Est Life	Rem Life	Future Cost
Signage							
Building Signs/Numbers	7/26	$2,000	1	$2,000	5	0:06	$2,030
Monument Sign/Wall	7/28	$2,000	1	$2,000	20	2:06	$2,153
Misc and Parking Signs	7/29	$1,000	1	$1,000	10	3:06	$1,109
				$5,000			**$5,292**
Structural							
Trash Enclosures	7/26	$7,500	1	$7,500	5	0:06	$7,612
Carport Support Posts-Beams	7/28	$5,000	1	$5,000	10	2:06	$5,383
				$12,500			**$12,995**

Upcoming Major Components

Date	Category	Component	Future Cost
2026-07-01	Painting	Painting Unit Buildings-Clubhouse-Exterior	$101,489
2026-07-01	Balconies-Decks-Stairways	Balconies-Decks-Posts/Structural Supports	$58,356
2026-07-01	Exterior Surfaces	Chimney Chases Structural Renovations	$58,356
2026-07-01	Asphalt	Asphalt Crack Seal	$25,372
2026-07-01	Concrete	Concrete Sidewalks-Stairs-Patios/Grinding-Repairs	$10,149
2026-07-01	Exterior Surfaces	Fascia-Flashing-Soffits	$10,149
2026-07-01	Landscape	Tree Removal-Major Trimming	$8,119
2026-07-01	Balconies-Decks-Stairways	Stairway/Balcony Railing	$7,612
2026-07-01	Structural	Trash Enclosures	$7,612
2026-07-01	Concrete	Curbs-Gutters	$5,074
2026-07-01	Painting	Parking Striping-Curb Painting	$5,074
2026-07-01	Plumbing	Sewer Lateral Lines-Cleanouts	$5,074
2026-07-01	Fences-Walls-Gates	Concrete Brick Grouted Wall	$2,537
2026-07-01	Fences-Walls-Gates	Pool Area Wall Repair	$2,537
2026-07-01	Landscape	Landscape Replenishment	$2,537
2026-07-01	Signage	Building Signs/Numbers	$2,030
2026-07-01	Landscape	Landscape Border Blocks	$1,015
2027-07-01	Painting	Painting Unit Buildings-Clubhouse-Exterior	$104,534

Largest summarized category by future cost: Roofing at $2,582,679. Lowest year-end reserve balance in the projection occurs in 2040, at $232,207. Highest projected percent funded occurs in 2055, at 74.76%.