Board of Directors
Ridge Park Luxury Condominiums Owners' Association Inc.
Los Alamos, New Mexico

Please find the attached report on the current Ridge Park reserve study. This study was compiled using project schedules discussed by the Maintenance and the Budget Committe in a joint meeting on April 22, 2026. The purpose of this report is to provide an idea of the overall mainenance needs and schedules anticipated over the next 30 years to ensure the common elements are maintained in good condition, thereby keeping the community safe, preserving home values, and ensuring a positive living experience in the community.

The report is intended to mirror the structure and feel of a conventional reserve study. The purpose is not to replace a proefsional reserve study, but to provide a transparent and digestable format.

The reserve model remains a planning tool rather than a prediction of exact future outcomes. Actual repair timing, pricing, inflation, and investment returns will differ from the assumptions used here. The goal is to keep the association approximately funded at approximately the right time and to make both short- and long-range reserve decisions easier to review.

Sincerely,

Brendan J. Gifford
Ridge Park Treasurer

Ridge Park Luxury Condominiums Owners' Association Inc.

Reserve Management Plan

Type 1

Reserve Study with Data-Driven Analysis

For 30-Year Projection Period Beginning January 1, 2026

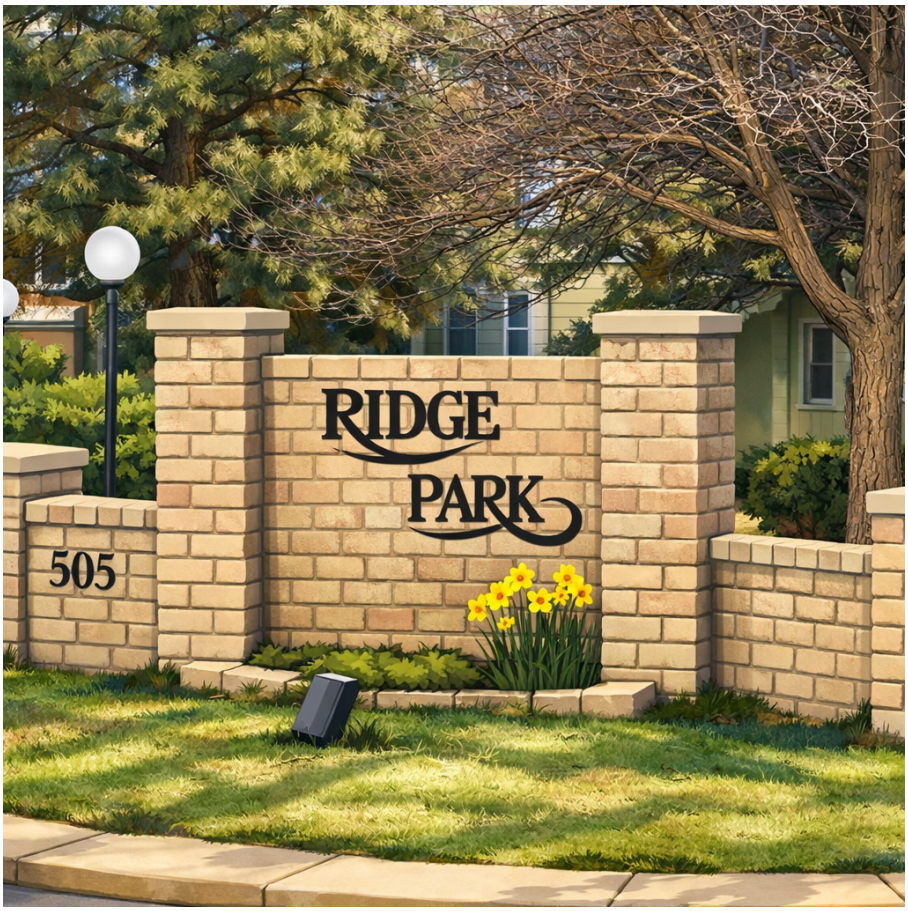

Contents

Preparer's Report on Reserve Study	**4**
Statement of Position	**7**
Summary of Major Components	**8**
Percent Funded - Annual - Ending Balance	**9**
Cash Flow - Annual	**10**
Disclosures	**11**
Expenditures Matrix: Years 1–10	**12**
Expenditures Matrix: Years 11–20	**13**
Expenditures Matrix: Years 21–30	**14**
Component List - Summary	**15**
Upcoming Major Components	**18**

Preparer's Report on Reserve Study

Report Description

This report was generated using a custom-built Python package. The workflow reads the Association's reserve assumptions, component inventory, replacement schedule, annual contribution plan, and reserve cash-flow projection, then produces a report in the format of a typical reserve study.

The report is intended to serve as a planning tool and to establish a baseline for future revisions as the Association's long-term reserve priorities, project scopes, and funding needs become clearer.

The assessment requirements shown in this report were generated with short-term affordability in mind. The objectives were to begin with an assessment level generally consistent with what homeowners are paying in 2026, increase assessments over the first five years sufficiently to address major deferred-maintenance projects expected during that period, and maintain sufficient reserve funding for longer-term projects. These include, among other items, roofing repairs, pavement repairs, siding replacement, and related exterior-building needs.

Engagement between Maintenance and Budget Committees

The Ridge Park Maintenance and Budget Committees met on April 15, 2026, to discuss maintenance priorities for 2026 and beyond. The committees reviewed maintenance schedules and estimates from the 2024 Reserve Plan. As a result of that discussion, the following components were introduced, revised, or rescheduled within the reserve study.

Unless otherwise stated, the dollar figures discussed in this section are shown in current dollars and are not adjusted for inflation. Inflation adjustments are incorporated in the maintenance schedules underlying the overall reserve study.

a. The structural engineering report identified the need to install railings around the patio area adjacent to the pool. The Maintenance Committee obtained estimates for this work, totaling approximately $21,000, and this amount has been integrated into the 2026 work plan.

b. The committees discussed the scope of the chimney chase structural renovations originally identified in the 2024 Reserve Study. This component has been broken into an annual cost beginning in the current year and continuing over the next six years. The estimate assumes that 23 chimney chases will be repaired each year at a cost of $2,500 per chase, for a total of $57,500 per year over the next six years. This component is then scheduled to recur every 20 years.

c. Asphalt crack repair is scheduled for 2026 at an estimated cost of $50,000. This work is expected to recur in four years. Approximately nine years from now, the plan shifts to a mill-and-overlay project covering approximately 100,000 square feet of asphalt.

d. The original reserve study included $8,000 per year for tree and shrub trimming, and that recurring amount is maintained in this version. Because the 2025 Board budgeted $15,000 for this item, an additional one-time expense of $7,000 has been added in 2026. This allows the reserve plan to reflect a $15,000 expenditure in 2026 without disrupting the recurring long-term funding assumption.

e. The 2026 plan includes $25,000 for gutter repairs to continue the work begun last year. The model then assumes that $25,000 will be spent every five years, which is approximately equivalent to collecting $5,000 per year for this component.

f. Buildings 2, 3, 4, 6, and 7 are scheduled for repainting in 2026 at a cost of $3 per square foot, for a total estimated cost of $185,000. The model assumes these buildings will be repainted again in 10 years. The remaining buildings are scheduled for repainting over the following two years and follow the same recurring schedule.

g. The original 2024 Reserve Study called for replacement of all building siding beginning immediately. The joint committee agreed that this schedule is likely too aggressive given the estimated $1.5 million cost. The committee also noted that the siding replacements associated with the repainting of Building 5 last year were satisfactory and

were included in the painting price. However, that may not be the case when other buildings are repainted. This reserve study therefore schedules full siding replacement to align with the next paint cycle, beginning in 2035 and continuing through 2037.

h. Metal stairway flashing and stringer repairs are included at $15,000 to cover work associated with multiple stairwells. This item is then scheduled to recur every seven years. Additional review may be needed to ensure that the remaining maintenance schedule is sufficiently funded.

i. Skylight replacement has been included at $5,000. Because this item was not included in the original reserve study, further research should be conducted to determine whether it should be treated as a recurring reserve component.

j. Fascia, flashing, and soffit repairs were included in the 2024 Reserve Study, but only at $10,000 every eight years, beginning in 2026. To ensure anticipated 2026 expenditures are covered, an additional $55,000 has been added in 2026.

k. Balcony, deck, and structural-support work is included beginning in 2027. The model assumes 23 repairs per year at $2,500 each, for a total of $57,500 per year, continuing through 2031. This component is then scheduled to recur every 20 years.

l. Replacement of one or two dumpster surrounds is scheduled for 2026 at a total estimated cost of $7,500. A design plan should be developed before this work proceeds.

m. Concrete work on the grouted walls was originally scheduled every three years at a cost of $2,500. The Maintenance Committee has identified an additional $12,000 of work it would like to complete in 2026. This amount has been added as a one-time cost so the recurring contribution schedule can be preserved.

n. Total landscape work of $13,500 is planned for 2026. This includes wildfire defensible-space planning, border blocks, and landscape replenishment.

o. Parking lot restriping in the amount of $5,000 is included in the 2026 plan.

p. Several smaller inspection and maintenance items are included in the plan. These include roof inspection and repair ($17,000), water valve inspection ($1,800), sewer inspection ($5,000), and lateral sewer-line cleanout ($5,000). These items begin in 2026 and recur every other year.

q. The brick wall beside the pool requires repair estimated at $2,500, which is budgeted in 2026. This item recurs at the same rate as other brick-wall components on the property.

Management's Responsibility

Management remains responsible for the assumptions underlying the reserve model. These include inflation, investment return, beginning reserve balance, component scope, useful-life estimates, replacement timing, and any planned contribution or special-assessment strategy.

The Board and committees should review all assumptions and estimates for accuracy, completeness, and reasonableness. The preparer may lack the technical expertise, project-specific knowledge, or operational insight needed to independently verify all maintenance assumptions and cost estimates.

Preparer Responsibility

The preparer's responsibility is limited to organizing the supplied data into financial exhibits, narrative disclosures, and summary schedules. The preparer is also responsible for ensuring that the report-generation process, data handling, and algorithms used by the custom Python package function as intended.

The preparer does not independently certify the accuracy of the underlying maintenance estimates, engineering assumptions, useful-life determinations, or Board-approved funding strategy.

Important Limitations

This report should be read together with the full set of assumptions, source data, schedules, and component-level details underlying the reserve model.

If any underlying source data changes, including component costs, project timing, useful-life assumptions, beginning

balances, contribution schedules, inflation assumptions, or investment-return assumptions, the report should be regenerated so that the tables, exhibits, and summary metrics remain aligned with the current model.

This document was not prepared by a credentialed professional. It is best treated as a transparent analytical report, not as a substitute for a professional reserve study.

Statement of Position

Projection period:	2026 to 2055
Type of project:	Reserve Study
Number of units:	138
Location:	Los Alamos, New Mexico
Project construction date:	1984
Analysis date:	January 1, 2026
Report prepared by:	Brendan J. Gifford, Treasurer

Metric	Value
Current Replacement Cost	$6,252,328
Future Replacement Cost	$9,038,538
Current Reserve Fund Balance	$620,000
Fully Funded Reserve Balance	$3,208,492
Percent Funded	19.32 %
Reserve Deficit	$2,588,492
Reserve Deficit per Unit	$18,757
Projected Annual Reserve Contribution	$250,000
Average Annual Reserve Contribution per Unit	$1,812
Projected Monthly Reserve Contribution	$20,833
Average Monthly Reserve Contribution per Unit	$151

First-year reserve contribution: $250,000. First-year ending balance: $281,597. Ending balance in the final projection year (2055): $5,820,418.

Summary of Major Components

Analysis Date - January 1, 2026 Inflation: 3.00% Investment: 2.50% Contribution Factor: 0.00

Category	Useful Lives	Replacement Years	Remaining Years	Future Cost
Exterior Surfaces	7-30	2026-2045	0:06-19:06	$2,917,769
Roofing	2-30	2026-2040	0:06-14:06	$2,602,459
Asphalt	3-30	2026-2056	0:06-30:06	$2,097,660
Painting	3-12	2026-2036	0:06-10:06	$582,014
Balconies-Decks-Stairways	5-30	2026-2031	0:06-5:06	$451,767
Flooring	12-20	2034	8:06	$75,081
Renovation	10-20	2029-2039	3:06-13:06	$63,913
Doors-Windows	10-30	2026-2036	0:06-10:06	$53,460
Concrete	3-25	2026-2044	0:06-18:06	$48,231
Fences-Walls-Gates	3-25	2026-2036	0:06-10:06	$47,645
Landscape	1-8	2026-2031	0:06-5:06	$31,866
Equipment	7-25	2028-2036	2:06-10:06	$29,002
Plumbing	2-12	2026-2031	0:06-5:06	$13,838
Structural	5-10	2026-2028	0:06-2:06	$12,995
Fire Safety	5	2029	3:06	$5,545
Signage	5-20	2026-2029	0:06-3:06	$5,292

Percent Funded - Annual - Ending Balance

Year	Ending Balance	Funded Balance	Percent Funded
2026	$281,597	$3,040,186	9.26%
2027	$332,715	$3,224,469	10.32%
2028	$364,793	$3,358,136	10.86%
2029	$572,165	$3,631,243	15.76%
2030	$830,292	$3,913,935	21.21%
2031	$970,181	$4,035,531	24.04%
2032	$1,453,725	$4,493,835	32.35%
2033	$1,891,729	$4,899,674	38.61%
2034	$2,323,061	$5,292,034	43.90%
2035	$2,268,276	$5,186,660	43.73%
2036	$1,502,456	$4,355,278	34.50%
2037	$1,343,816	$4,131,587	32.53%
2038	$1,100,527	$3,823,940	28.78%
2039	$1,025,616	$3,686,520	27.82%
2040	$939,479	$3,540,199	26.54%
2041	$1,213,095	$3,758,040	32.28%
2042	$1,589,653	$4,084,353	38.92%
2043	$1,944,739	$4,395,288	44.25%
2044	$2,218,989	$4,630,797	47.92%
2045	$2,508,403	$4,870,739	51.50%
2046	$1,966,063	$4,263,691	46.11%
2047	$2,168,179	$4,395,580	49.33%
2048	$2,350,557	$4,501,997	52.21%
2049	$2,908,642	$4,979,720	58.41%
2050	$3,314,241	$5,299,701	62.54%
2051	$3,599,618	$5,501,970	65.42%
2052	$4,222,848	$6,046,502	69.84%
2053	$4,727,992	$6,468,284	73.09%
2054	$5,217,614	$6,869,508	75.95%
2055	$5,820,418	$7,379,078	78.88%

Cash Flow - Annual

Year	Begin	Contribution	Special Assess.	Expenditures	Interest	Ending
2026	$620,000	$250,000	$0	$601,204	$12,802	$281,597
2027	$281,597	$300,000	$0	$257,405	$8,522	$332,715
2028	$332,715	$350,000	$0	$327,685	$9,762	$364,793
2029	$364,793	$400,000	$0	$205,164	$12,537	$572,165
2030	$572,165	$450,000	$0	$210,283	$18,410	$830,292
2031	$830,292	$500,000	$0	$383,915	$23,804	$970,181
2032	$970,181	$520,000	$0	$67,381	$30,925	$1,453,725
2033	$1,453,725	$540,000	$0	$144,615	$42,618	$1,891,729
2034	$1,891,729	$560,000	$0	$182,242	$53,574	$2,323,061
2035	$2,323,061	$580,000	$0	$694,184	$59,400	$2,268,276
2036	$2,268,276	$600,000	$0	$1,416,552	$50,731	$1,502,456
2037	$1,502,456	$610,000	$0	$806,522	$37,882	$1,343,816
2038	$1,343,816	$620,000	$0	$896,356	$33,067	$1,100,527
2039	$1,100,527	$630,000	$0	$733,664	$28,753	$1,025,616
2040	$1,025,616	$640,000	$0	$752,930	$26,794	$939,479
2041	$939,479	$650,000	$0	$404,778	$28,394	$1,213,095
2042	$1,213,095	$660,000	$0	$319,780	$36,338	$1,589,653
2043	$1,589,653	$670,000	$0	$360,486	$45,572	$1,944,739
2044	$1,944,739	$680,973	$0	$460,379	$53,656	$2,218,989
2045	$2,218,989	$701,402	$0	$472,730	$60,741	$2,508,403
2046	$2,508,403	$722,444	$0	$1,324,223	$59,440	$1,966,063
2047	$1,966,063	$744,118	$0	$595,645	$53,642	$2,168,179
2048	$2,168,179	$766,441	$0	$642,629	$58,566	$2,350,557
2049	$2,350,557	$789,435	$0	$298,443	$67,093	$2,908,642
2050	$2,908,642	$813,118	$0	$487,074	$79,556	$3,314,241
2051	$3,314,241	$837,511	$0	$640,673	$88,539	$3,599,618
2052	$3,599,618	$862,637	$0	$338,664	$99,258	$4,222,848
2053	$4,222,848	$888,516	$0	$497,087	$113,714	$4,727,992
2054	$4,727,992	$915,171	$0	$551,829	$126,280	$5,217,614
2055	$5,217,614	$942,626	$0	$479,612	$139,791	$5,820,418

Disclosures

- This report was generated from current component inventory and condition, projected expenditures, annual contribution schedules, and reserve cash-flow projections.
- Analysis date: January 1, 2026. Projection horizon: 30 years.
- Inflation assumption used in the model: 3.00%.
- Investment return assumption used in the model: 2.50%.
- Beginning reserve balance used in the projection: $620,000.
- While component replacement timing and cost estimates are best guesses, actual field conditions may cause different timing or scope.
- This document is formatted to resemble a conventional reserve study using custom Python-based software designed and written by Brendan J. Gifford rather than from proprietary reserve-study software.
- Readers should review contribution levels, projected expenditures, and percent-funded results together. No single table should be interpreted in isolation.

Expenditures Matrix: Years 1–10

Category	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035
Asphalt	$50,744				$28,557					$397,260
Balconies-Decks-Stairways	$102,504	$60,107	$92,058	$63,767	$65,680	$67,651		$49,927	$9,642	
Concrete	$15,223			$16,635			$18,177			$19,863
Doors-Windows	$6,089									$22,820
Equipment			$6,331		$1,713	$3,000	$909			
Exterior Surfaces	$124,324	$60,107	$61,910	$74,857	$65,680	$173,539		$6,241	$12,856	
Fences-Walls-Gates	$17,253		$1,615	$11,090		$2,941	$3,030	$1,872	$6,428	$3,310
Fire Safety				$5,545					$6,428	
Flooring									$75,081	
Landscape	$28,924	$18,816	$19,381	$23,843	$20,561	$24,119	$26,054	$22,467	$23,141	$28,470
Painting	$192,860	$118,375	$127,169	$5,545	$15,695		$6,059		$3,857	$82,943
Plumbing	$11,015		$11,685		$12,397	$2,824	$13,152		$13,953	
Renovation				$2,772		$8,824			$30,855	
Roofing	$42,625					$89,840		$64,107		$139,518
Signage	$2,030		$2,153	$1,109		$2,353				
Structural	$7,612		$5,383			$8,824				

Expenditures Matrix: Years 11–20

Category	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045
Asphalt			$36,175		$61,404	$39,529			$43,195	$71,185
Balconies-Decks-Stairways	$4,092		$36,175		$23,027		$12,214	$41,936	$5,183	
Concrete			$21,705			$23,717			$58,924	
Doors-Windows	$24,551									
Equipment	$17,049	$2,107			$4,421			$5,032	$2,592	
Exterior Surfaces	$223,957	$210,727	$217,048	$223,560	$230,267	$237,175	$260,576	$276,780	$259,167	$266,942
Fences-Walls-Gates	$23,869		$5,788	$11,178		$7,906		$2,516	$12,958	
Fire Safety				$7,452					$8,639	
Flooring										
Landscape	$24,551	$25,287	$31,110	$30,553	$27,632	$33,995	$29,315	$30,194	$37,147	$32,033
Painting	$300,106	$159,086	$178,139		$21,092	$7,906			$13,822	$102,570
Plumbing	$14,803		$15,704		$16,661		$17,675	$4,026	$18,752	
Renovation				$25,188						
Roofing	$770,618	$409,315	$347,277	$434,243	$368,427	$39,529				
Signage	$2,728			$1,490		$3,162				
Structural	$10,229		$7,235			$11,859				

Expenditures Matrix: Years 21–30

Category	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055
Asphalt		$47,200			$51,577	$254,994	$262,644	$326,883	$278,639	$286,998
Balconies-Decks-Stairways	$105,398	$136,879	$160,432	$115,171	$134,099	$122,185	$6,566	$56,359	$34,830	
Concrete		$28,320			$30,946			$33,815		
Doors-Windows	$32,994									
Equipment	$4,674	$1,416				$8,500	$6,303			
Exterior Surfaces	$105,398	$108,560	$111,816	$115,171	$159,887	$122,185		$11,272		
Fences-Walls-Gates	$4,583	$4,720	$2,917	$15,022	$5,158	$5,312		$9,017	$11,610	
Fire Safety				$10,015					$11,610	
Flooring	$65,988								$52,013	
Landscape	$32,994	$45,312	$35,003	$36,053	$44,356	$38,249	$39,397	$48,469	$41,796	$49,029
Painting	$339,162	$223,238	$297,743		$38,662			$11,272	$6,966	$137,845
Plumbing	$19,894		$21,105		$22,390		$23,754		$25,201	$5,740
Renovation				$5,007		$15,937			$89,165	
Roofing	$595,726					$53,124				
Signage	$3,666		$3,889	$2,003		$4,250				
Structural	$13,748		$9,723			$15,937				

Component List - Summary

Category Component	Replace Date	Basis Cost	Quantity	Current Cost	Est Life	Rem Life	Future Cost
Asphalt							
Asphalt Crack Seal	7/26 - 7/38	$50,000	3	$100,000	3	0:06-12:06	$115,476
Asphalt Mill and Overlay	7/35 - 7/35	$3	100,000	$300,000	15	9:06	$397,260
Asphalt Seal Coat	7/40 - 7/56	$0	300,000	$120,000	5	14:06-30:06	$231,125
Asphalt Remove and Replace	7/51 - 7/55	$6	100,000	$600,000	30	25:06-29:06	$1,353,799
				$1,120,000			**$2,097,660**
Balconies-Decks-Stairways							
Adding Walkway Railing	7/26	$21,000	1	$21,000	30	0:06	$21,313
Metal Stairway Flashing/Stringers	7/26	$15,000	1	$15,000	7	0:06	$15,223
Stairway/Balcony Railing	7/26 - 7/26	$7,500	24	$65,000	8-20	0:06	$65,968
Balconies-Decks-Posts/Structural Supports	7/27 - 7/31	$2,500	115	$287,500	20	1:06-5:06	$319,115
Walkway Railing	7/28	$3,000	1	$3,000	8	2:06	$3,230
Wood Balcony Walls	7/28	$25,000	1	$25,000	5	2:06	$26,917
				$416,500			**$451,767**
Concrete							
Concrete Sidewalks-Stairs-Patios/Grinding-Repairs	7/26	$10,000	1	$10,000	3	0:06	$10,149
Curbs-Gutters	7/26	$5,000	1	$5,000	3	0:06	$5,074
Pool Area Concrete Deck	7/44	$12	1,592	$19,104	25	18:06	$33,008
				$34,104			**$48,231**
Doors-Windows							
Skylights	7/26	$6,000	1	$6,000	30	0:06	$6,089
Raise and Replace Windows	7/35	$17,233	1	$17,233	30	9:06	$22,820
Clubhouse Bathroom/Interior Doors	7/36	$5,000	1	$5,000	10	10:06	$6,820
Clubhouse Blinds	7/36	$1,000	1	$1,000	10	10:06	$1,364
Clubhouse Glass Doors	7/36	$3,500	1	$3,500	10	10:06	$4,774
Clubhouse Sliding Glass Doors	7/36	$4,000	1	$4,000	10	10:06	$5,456
Clubhouse/Fitness Windows	7/36	$4,500	1	$4,500	10	10:06	$6,138
				$41,233			**$53,460**
Equipment							
Pool Cover	7/28	$4	720	$2,880	12	2:06	$3,101
Pool Heater Raypak	7/28	$3,000	1	$3,000	15	2:06	$3,230
Pool Misc Pipes Valves	7/30	$1,500	1	$1,500	7	4:06	$1,713
Pool Filter Hayward	7/31	$1,300	1	$1,300	15	5:06	$1,530
Pool Rails-Ladder	7/31	$250	3	$750	15	5:06	$882
Pool Room Compressor	7/31	$500	1	$500	15	5:06	$588
Pool Pump Hayward	7/32	$750	1	$750	15	6:06	$909
Mail Boxes	7/36	$10,000	1	$10,000	25	10:06	$13,639
Pool Chemical Controller-Rola Chem	7/36	$2,500	1	$2,500	15	10:06	$3,410
				$23,180			**$29,002**
Exterior Surfaces							
Chimney Chases Structural Renovations	7/26 - 7/31	$2,500	138	$345,000	20	0:06-5:06	$377,471
Fascia-Flashing-Soffits	7/26 - 7/26	$55,000	2	$65,000	8	0:06	$65,968
Stucco Siding Repair	7/29	$10,000	1	$10,000	7	3:06	$11,090
Clubhouse Siding	7/31	$12	7,500	$90,000	30	5:06	$105,888
Corrugated Balcony Walls	7/33	$5,000	1	$5,000	10	7:06	$6,241
Pool Coping	7/36	$35	120	$4,200	20	10:06	$5,728
Wood Siding	7/36 - 7/45	$12	125,000	$1,500,000	30	10:06-19:06	$2,345,383

Category Component	Replace Date	Basis Cost	Quantity	Current Cost	Est Life	Rem Life	Future Cost
				$2,019,200			**$2,917,769**
Fences-Walls-Gates							
Concrete Brick Grouted Wall	7/26 - 7/26	$12,000	2	$14,500	3	0:06	$14,716
Pool Area Wall Repair	7/26	$2,500	1	$2,500	5	0:06	$2,537
Stacked Concrete Block Wall	7/28	$1,500	1	$1,500	5	2:06	$1,615
Chain Link Fence	7/29	$2,500	1	$2,500	10	3:06	$2,772
Wooden Perimeter Fence	7/29	$5,000	1	$5,000	5	3:06	$5,545
Pool Area Metal Rail Fence-Gate	7/36	$75	200	$15,000	25	10:06	$20,459
				$41,000			**$47,645**
Fire Safety							
Chimney Flues-Caps-Spark Arrestors	7/29	$5,000	1	$5,000	5	3:06	$5,545
				$5,000			**$5,545**
Flooring							
Clubhouse Carpet	7/34	$9	4,000	$36,000	12	8:06	$46,283
Clubhouse Tile Floor	7/34	$16	1,000	$16,000	20	8:06	$20,570
Pool Area Tile Exterior	7/34	$16	400	$6,400	20	8:06	$8,228
				$58,400			**$75,081**
Landscape							
Landscape Border Blocks	7/26	$1,000	1	$1,000	3	0:06	$1,015
Landscape Replenishment	7/26	$2,500	1	$2,500	3	0:06	$2,537
Landscaping, Wildfire Defensible Space	7/26	$10,000	1	$10,000	1	0:06	$10,149
Tree Removal-Major Trimming	7/26 - 7/26	$8,000	2	$15,000	1	0:06	$15,223
Landscape Rock	7/31	$2,500	1	$2,500	8	5:06	$2,941
				$31,000			**$31,866**
Painting							
Painting Building 2	7/26	$3	11,539	$34,617	10	0:06	$35,132
Painting Building 3	7/26	$3	11,213	$33,639	10	0:06	$34,140
Painting Building 4	7/26	$3	15,029	$45,087	10	0:06	$45,758
Painting Building 6	7/26	$3	11,948	$35,844	10	0:06	$36,378
Painting Building 7	7/26	$3	11,948	$35,844	10	0:06	$36,378
Parking Striping-Curb Painting	7/26	$5,000	1	$5,000	3	0:06	$5,074
Painting Building 1	7/27	$3	11,539	$34,617	10	1:06	$36,186
Painting Building 13	7/27	$3	11,799	$35,397	10	1:06	$37,002
Painting Building 8	7/27	$3	14,409	$43,227	10	1:06	$45,187
Painting Building 10	7/28	$3	11,799	$35,397	10	2:06	$38,112
Painting Building 11	7/28	$3	7,886	$23,658	10	2:06	$25,472
Painting Building 12	7/28	$3	11,799	$35,397	10	2:06	$38,112
Painting Building 9	7/28	$3	7,886	$23,658	10	2:06	$25,472
Painting Buidling 14	7/30	$3	4,580	$13,740	10	4:06	$15,695
Pool Area Metal Rail Fence-Gate-Painting	7/34	$15	200	$3,000	10	8:06	$3,857
Painting Building 5	7/35	$4	14,409	$57,636	10	9:06	$76,322
Clubhouse Interior Painting	7/36	$2	20,000	$35,000	12	10:06	$47,737
				$530,758			**$582,014**
Plumbing							
Sewer Inspection, Semi-annual Inspection	7/26	$4,097	1	$4,097	2	0:06	$4,158
Sewer Lateral Lines-Cleanouts	7/26	$5,000	1	$5,000	2	0:06	$5,074
Water Valve and Line Annual Inspection	7/26	$1,756	1	$1,756	2	0:06	$1,782
Clubhouse Hot Water Heaters-Expansion	7/31	$1,200	2	$2,400	12	5:06	$2,824
				$13,253			**$13,838**

Category Component	Replace Date	Basis Cost	Quantity	Current Cost	Est Life	Rem Life	Future Cost
Renovation							
Clubhouse Maintenance Shop Remodel	7/29	$2,500	1	$2,500	10	3:06	$2,772
Clubhouse Pool Room-Shower Remodel	7/31	$5,000	1	$5,000	20	5:06	$5,883
Sauna Remodel	7/31	$2,500	1	$2,500	20	5:06	$2,941
Clubhouse Bar Remodel	7/34	$5,000	1	$5,000	20	8:06	$6,428
Clubhouse Bathroom Remodel	7/34	$6,000	2	$12,000	20	8:06	$15,428
Fitness Room Kitchenette Remodel	7/34	$3,500	1	$3,500	20	8:06	$4,500
Laundry Room Remodel	7/34	$3,500	1	$3,500	20	8:06	$4,500
Pool Resurface	7/39	$12	1,200	$14,400	15	13:06	$21,462
				$48,400			**$63,913**
Roofing							
Gutters-Downspouts	7/26	$25,000	1	$25,000	5	0:06	$25,372
Roof Inspection and Repair	7/26	$17,000	1	$17,000	2	0:06	$17,253
Carport Roofs	7/31 - 7/39	$12	21,400	$256,800	25	5:06-13:06	$341,244
Clubhouse Roof	7/35	$12	4,500	$54,000	25	9:06	$71,507
Garage Flat Roof	7/36	$300,000	1	$300,000	10	10:06	$409,178
Unit Building Shingle Roofs	7/36 - 7/40	$12	100,000	$1,200,000	30	10:06-14:06	$1,737,905
				$1,852,800			**$2,602,459**
Signage							
Building Signs/Numbers	7/26	$2,000	1	$2,000	5	0:06	$2,030
Monument Sign/Wall	7/28	$2,000	1	$2,000	20	2:06	$2,153
Misc and Parking Signs	7/29	$1,000	1	$1,000	10	3:06	$1,109
				$5,000			**$5,292**
Structural							
Trash Enclosures	7/26	$7,500	1	$7,500	5	0:06	$7,612
Carport Support Posts-Beams	7/28	$5,000	1	$5,000	10	2:06	$5,383
				$12,500			**$12,995**

Upcoming Major Components

Date	Category	Component	Future Cost
2026-07-01	Balconies-Decks-Stairways	Stairway/Balcony Railing	$58,356
2026-07-01	Exterior Surfaces	Chimney Chases Structural Renovations	$58,356
2026-07-01	Exterior Surfaces	Fascia-Flashing-Soffits	$55,819
2026-07-01	Asphalt	Asphalt Crack Seal	$50,744
2026-07-01	Painting	Painting Building 4	$45,758
2026-07-01	Painting	Painting Building 6	$36,378
2026-07-01	Painting	Painting Building 7	$36,378
2026-07-01	Painting	Painting Building 2	$35,132
2026-07-01	Painting	Painting Building 3	$34,140
2026-07-01	Roofing	Gutters-Downspouts	$25,372
2026-07-01	Balconies-Decks-Stairways	Adding Walkway Railing	$21,313
2026-07-01	Roofing	Roof Inspection and Repair	$17,253
2026-07-01	Balconies-Decks-Stairways	Metal Stairway Flashing/Stringers	$15,223
2026-07-01	Fences-Walls-Gates	Concrete Brick Grouted Wall	$12,179
2026-07-01	Concrete	Concrete Sidewalks-Stairs-Patios/Grinding-Repairs	$10,149
2026-07-01	Exterior Surfaces	Fascia-Flashing-Soffits	$10,149
2026-07-01	Landscape	Landscaping, Wildfire Defensible Space	$10,149
2026-07-01	Landscape	Tree Removal-Major Trimming	$8,119

Largest summarized category by future cost: Exterior Surfaces at $2,917,769. Lowest year-end reserve balance in the projection occurs in 2026, at $281,597. Highest projected percent funded occurs in 2055, at 78.88%.